

LINEMAN LASHER


61400 SERIES

The Lineman™ Lasher is the pull type cable lasher for tough jobs, especially in dusty, wet or icy conditions. Use it to lash single or multiple cables up to 3" outside diameter and for single and double overlapping.

You won't get snagged in trees and tight places with the Lineman™ Lasher because of the smooth, tapered cowl. Transfer time around poles is cut by as much as one-third, with the wire quick release trigger mounts below the handle for easy, one-hand engagement and release for continuous lashing.

Versatility means less downtime and smooth operation. A key feature is that the Lineman™ requires no strand traction to drive rotation – this means you can now lash in any weather. The tough, precision drive system needs no adjustment and delivers even lashing action. The strand brake keeps wire tight prevents the lasher from sliding backward when forward motion is halted.

The Lineman™ Lasher holds up to 1200 ft. per coil of 0.045" lashing wire without reloading, and works compatibly with up to 1/2" strands. A flat base ensures the lasher won't roll around in transit, and the ergonomic handle and controls add to total precision performance.

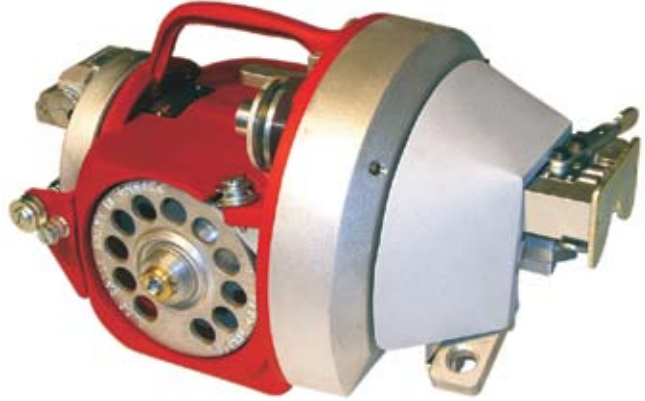

Part No.	Max Strand	Max Lash	Wire Size	Spool Size	Overall Dimensions	Weight
61400-000	1/2"	3" DIA.	045"	1,200 FT/COIL	19-1/2" X 12" X 12"	38 LB

LINEMAN LASHER ACCESSORIES

Part No.	Description	Overall Dimensions	Weight
61436-000	HALO BRUSH GUARD	9.7" x 4.4" x 2.5"	1.6 LB
61438-000	OVERLASH ASSEMBLY	6.3" x 4.4" x 2.7"	3.3 LB
61439-000	TOW ROPE (3/8" ROPE X 3/4" HOOK)	60" LONG	1.0 LB
61440-000	OVERSIZE STRAND LOCK ASSEMBLY	5.6" x 2.9" x 2.3"	1.2 LB

CORNER BLOCKS

62000 SERIES

The DCD Corner Block is used to guide cable around turns whether you are pulling cable in the horizontal or vertical position. The Corner Block maintains a 19" radius through the arc of the corner block. The Corner Blocks can be used for pulling in copper, fiber optic or coaxial cables. There are two adjustable rollers used to secure cable in the Corner Block.

Part No.	Model	Degree of Arc	Weight
62000-000	CB-45	45 DEG.	14 LB
62100-000	CB-90	90 DEG.	20 LB



UNIVERSAL CORNER BLOCK POLE BRACKET

62300 SERIES

The Universal Corner Block Pole Bracket is used to mount the corner blocks to poles in either the horizontal or vertical position. A 2" wide heavy-duty strap and ratchet are used to retain the Universal Corner Block Pole Bracket to the pole.

Part No.	Model	Dimensions	Weight
62300-000	PB-4590	9" X 12" X 13"	13 LB

