

OPERATING SPECIFICATIONS

DCD Design & Manufacturing Ltd.

42200-060 - METERBOX PULLER FOR TUF-LUGGER LITE

1. The Meterbox Puller for Tuf-lugger Lite is intended for use with the Vertical Pull Support 42200-050 and the Tuf-lugger lite series of winches. Complete assembly is required as shown prior to use. Cable or rope may be routed to allow for a downward, upward, or sideways pull.



OPERATING INSTRUCTIONS




**Design &
Manufacturing Ltd.**

METERBOX PULLER FOR TUF-LUGGER LITE




OPERATION

1. Install the Meterbox Puller to the Vertical pull support (42200-050) using the bolt provided.
2. Mount the Tuff-lugger lite winch to the Vertical pull support.
3. Mount the Meterbox guide into the duct that will be used for pulling. Note: the standard guide provided with the unit is intended for a 3" dia. duct.
4. Provide a flat, level surface for operation and maintain the arm of the meterbox puller as upright as possible.
5. Follow all guidelines per instructions provided with the Vertical pull support and Tuf-lugger lite.

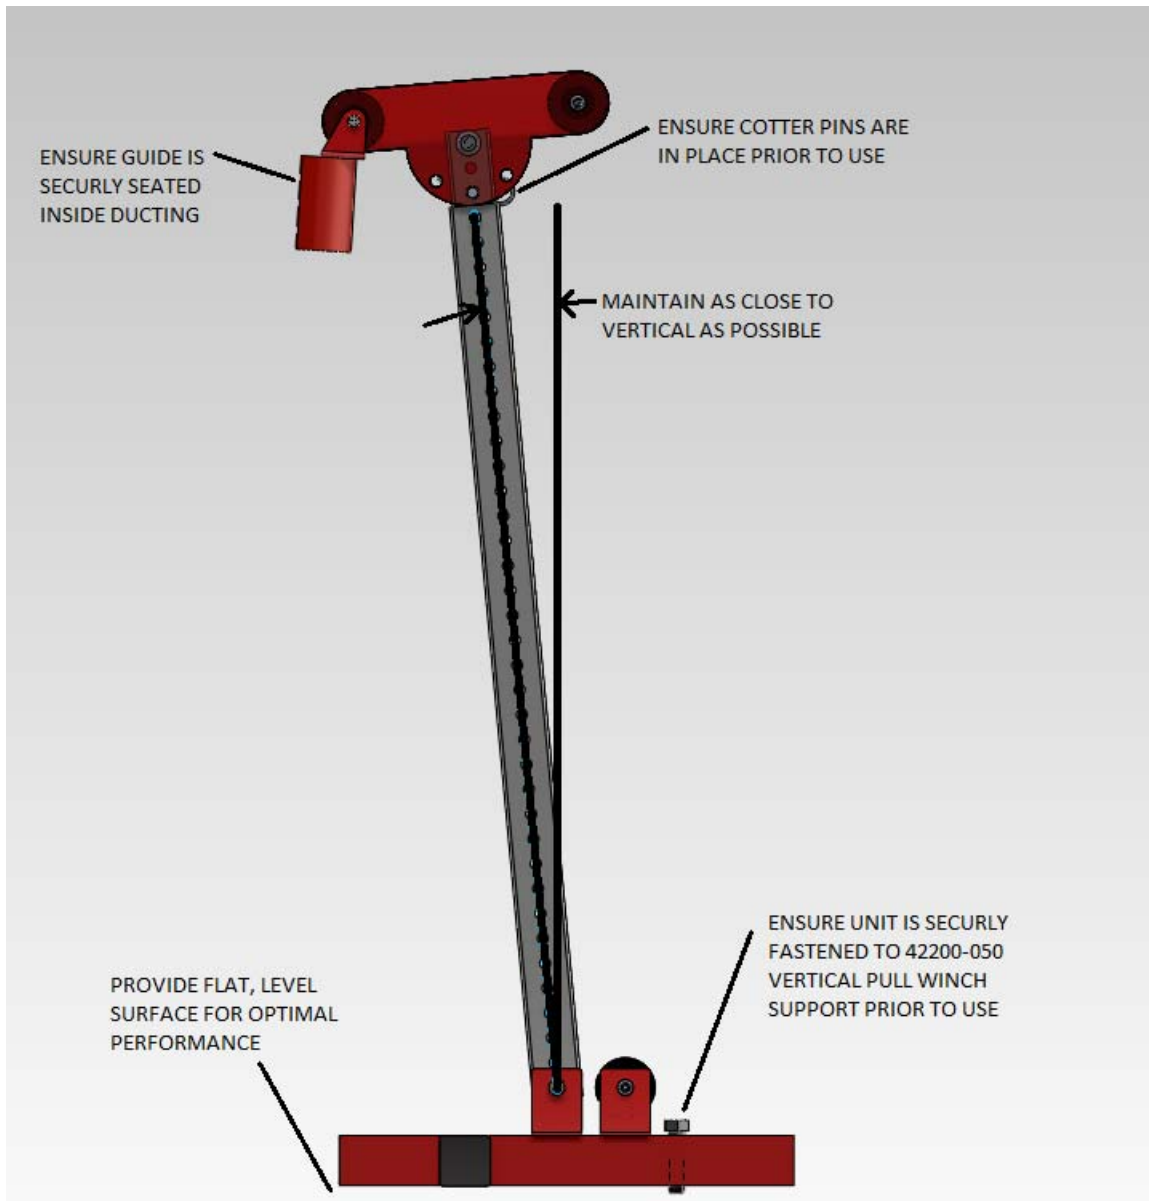

ROUTING

1. Rope may be routed through the Meterbox puller in the following ways. Ensure the guide is securely seated into the ducting prior to operation.

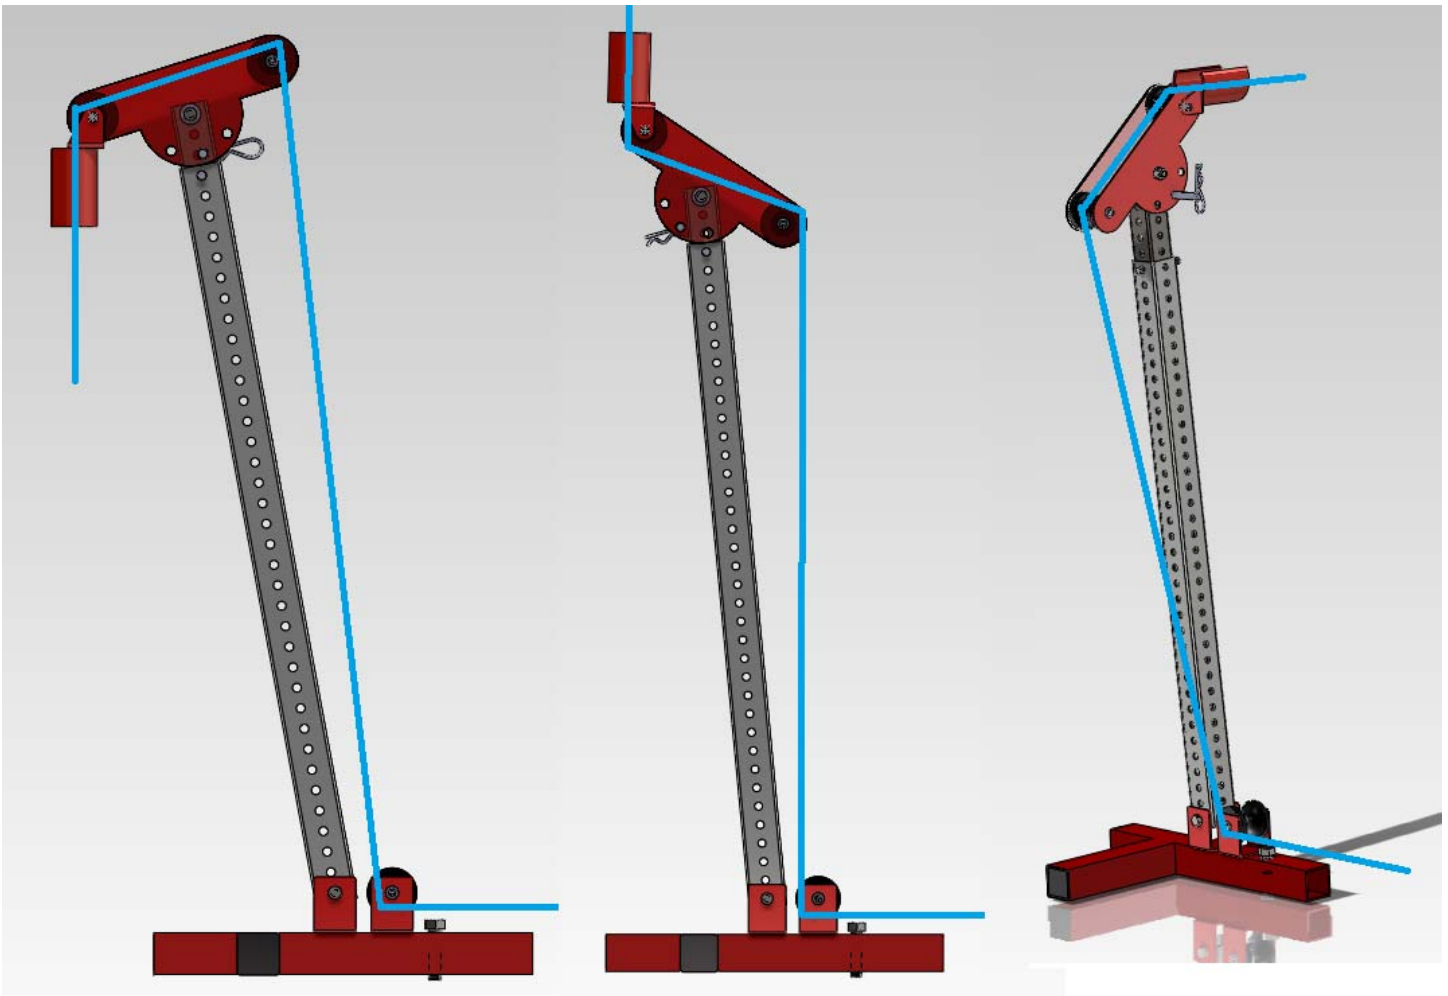

SAFETY



1. Keep hands clear during operation. The movable joints will stiffen once the pulling rope is under tension. Apply load slowly and gently until you are confident with your setup.
2. Using the Meterbox puller with the support arm in a highly angled position may cause the base to lift up from the ground. Use only in the recommended orientations.
3. Never use a worn, defective or incomplete component. Inspect product condition prior to use.
4. Be prepared for the unexpected. Use recognized safety practices and wear recognized safety equipment.

SERVICE



1. After each use, assess the condition of the product checking for wear and damage. Inspect bolts for looseness. Inspect sheaves for damage or wear.